

Adige



PRIMI
CERAMICHE



For over 30 years **Primi Ceramiche** brand has been representing the best expression of Italian excellence and design applied to its products. **Porcelain floors and walls, for indoor and outdoor**, made with the aim of ensuring sturdiness and able to **preserve their beauty over time**.



The nuance of colours and the variety of available finishes for this collection allows to meet the needs of design and the taste of our customers.


Sizes

600×600mm
300×600mm
300×300mm

Finishes


Matt
Semipolished
Antislip

Colours

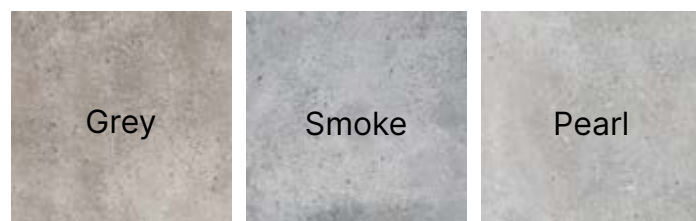

Mosaics

For most sophisticated we recommend **Mosaic Line**, custom solutions that we produce only upon request.

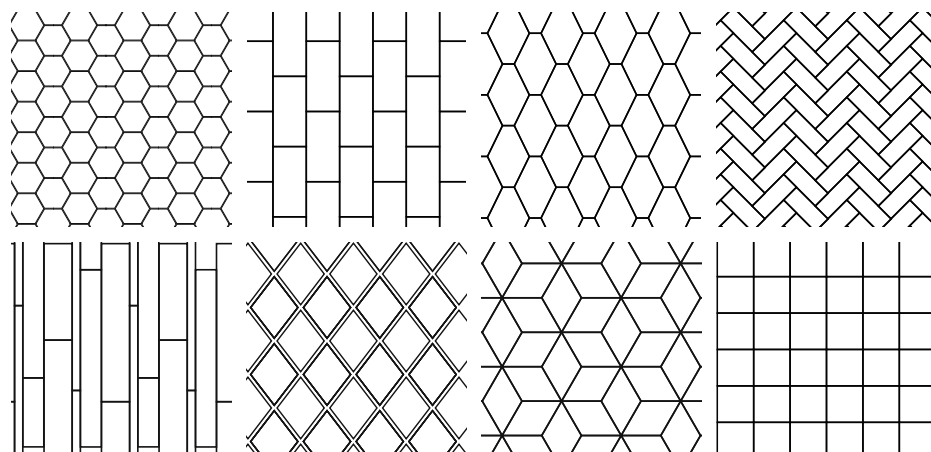

Technical Characteristics

GLAZED CERAMIC TILES

| TEST ITEM | | REFERENCE STANDARD | STANDARD REQUIREMENTS | TEST RESULTS |
|-----------------------------------|-------------------------|--------------------|---|---|
| WATER ABSORPTION | | ISO 10545-3 | 1% - <3% | 0,78% |
| BREAKAGE PRESSURE (N) | | ISO 10545-4 | ≥600N | 1463N |
| SURFACE QUALITY | | ISO 10545-2 | 95% of the tiles will not show any surface defects inspected with the naked eye from 1 meter distance | Conforming |
| SURFACE FLATNESS | Center bending strength | ISO 10545-2 | ±0.5 | -0.07%~±0.03% |
| | Warpage | ISO 10545-2 | ±0.5 | 0~±0.16% |
| | Side bending strength | ISO 10545-2 | ±0.5 | 0~±0.17% |
| SIDE DEVIATION | | ISO 10545-2 | ±0.6% | 0~±0.13% |
| SIDE LENGH | | ISO 10545-2 | ±0.6% | 0~±0.13% |
| RECTANGULARITY | | ISO 10545-2 | ±0.6% | 0.08%~±0.08% |
| STRAIGHTNESS OF SIDES | | ISO 10545-2 | ±0.5% | 0.03%~±0.03% |
| RESISTANCE TO SURFACE ABRASION | | ISO 10545-7 | 2100,6000,12000 | CLASS 4 Failure visible at 2100 revolutions |
| SLIP RESISTANCE-WET PENDULUM TEST | | AS4586-2013 | METHOD SLIDER 96: SRV 35-44 | P3 (SRV 43) |
| RESISTANCE TO CHEMICAL | | ISO 10545-13 | NO DAMAGE | NO DAMAGE |
| STAIN RESISTANCE | | ISO 10545-14 | MIN.CLASS 3 | CLASS 4 |



Via L. Ariosto 30, 35128 Padova – ITALY
+39 049 780 8487
info@expocasapadova.it