

Evolution

TWARE
SHOES & ACCESSORIES

+1
WOMAN



PRIMI
CERAMICHE



For over 30 years **Primi Ceramiche** brand has been representing the best expression of Italian excellence and design applied to its products. **Porcelain floors and walls, for indoor and outdoor**, made with the aim of ensuring sturdiness and able to **preserve their beauty over time**.




The nuance of colours and the variety of available finishes for this collection allows to meet the needs of design and the taste of our customers.

Colours




Grey



Pearl

Mosaics

For most sophisticated we recommend **Mosaic Line**, custom solutions that we produce only upon request.

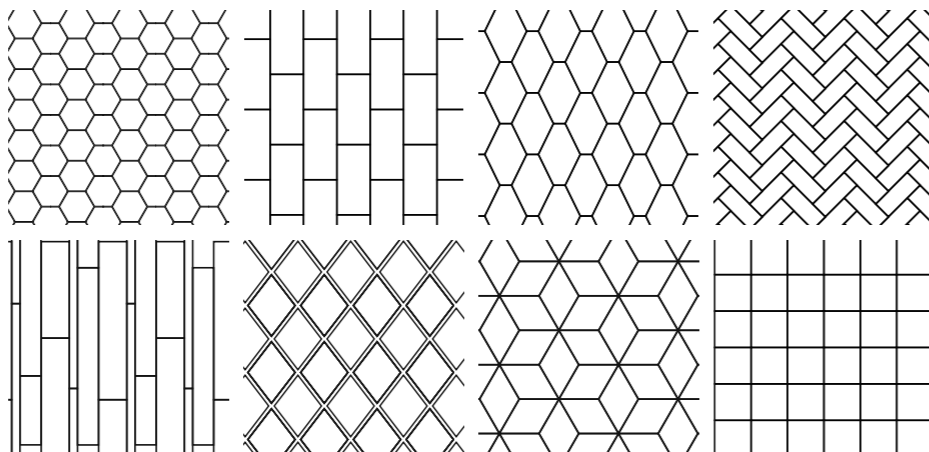

Sizes

600×600mm
300×600mm
300×300mm
600×1200mm

Finishes

Matt
Semipolished
Antislip



Technical Characteristics

GLAZED CERAMIC TILES

TEST ITEM		REFERENCE STANDARD	STANDARD REQUIREMENTS	TEST RESULTS
WATER ABSORPTION		ISO 10545-3	1% - <3%	0,78%
BREAKAGE PRESSURE (N)		ISO 10545-4	≥600N	1463N
SURFACE QUALITY		ISO 10545-2	95% of the tiles will not show any surface defects inspected with the naked eye from 1 meter distance	Conforming
SURFACE FLATNESS	Center bending strength	ISO 10545-2	±0.5	-0.07%~±0.03%
	Warpage	ISO 10545-2	±0.5	0~±0.16%
	Side bending strength	ISO 10545-2	±0.5	0~±0.17%
SIDE DEVIATION		ISO 10545-2	±0.6%	0~±0.13%
SIDE LENGH		ISO 10545-2	±0.6%	0~±0.13%
RECTANGULARITY		ISO 10545-2	±0.6%	0.08%~±0.08%
STRAIGHTNESS OF SIDES		ISO 10545-2	±0.5%	0.03%~±0.03%
RESISTANCE TO SURFACE ABRASION		ISO 10545-7	2100,6000,12000	CLASS 4 Failure visible at 2100 revolutions
SLIP RESISTANCE-WET PENDULUM TEST		AS4586-2013	METHOD SLIDER 96: SRV 35-44	P3 (SRV 43)
RESISTANCE TO CHEMICAL		ISO 10545-13	NO DAMAGE	NO DAMAGE
STAIN RESISTANCE		ISO 10545-14	MIN.CLASS 3	CLASS 4



Via L. Ariosto 30, 35128 Padova – ITALY
+39 049 780 8487
info@expocasapadova.it